



- Rugged through-pin hinge is engineered to minimize play and door sag.
- Built-in cam gently raises the opening door to reduce friction and gasket wear and holds open dwell beyond 150°.
- Furnished right hand; can be reversed.

SPECIFICATIONS

MATERIAL:
High pressure
die-cast alumi-
num; nylon cam
and follower

OFFSET:
See order information, below


LOAD RATING:
See Hinge Selector Chart,
Page B24, Group F

FINISH:
See order information, below

MOUNTING:
Drilled and countersunk for
1/4" (6.0mm) flat
head screws (not
included)

PACKAGING:
6 each

WEIGHT:
Approx. 10.5 lb. (4.7kg)
per carton

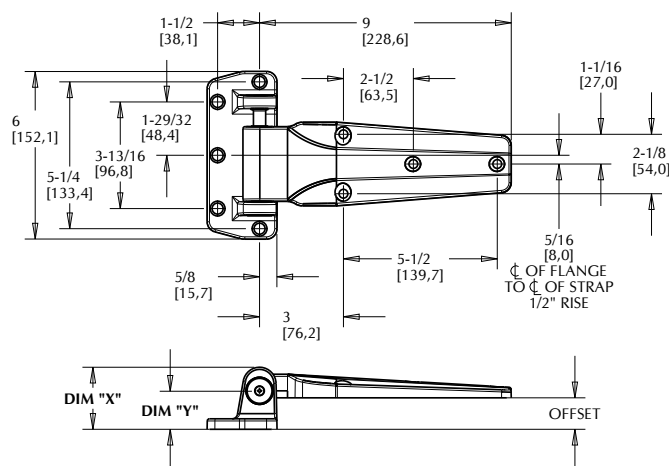

Model No.	Item	Offset	Finish
11240000016	Hinge	1-3/8" (34.9 mm)	Powder Coat
11240000020	Hinge	Flush (0.0)	Polished Aluminum
11240000024	Hinge	1-1/8" (28.6 mm)	Polished Aluminum
11240000028	Hinge	1-1/4" (31.8 mm)	Polished Aluminum
11240000032	Hinge	1-3/8" (34.9 mm)	Polished Aluminum

OFFSET	DIM "X"	DIM "Y"
FLUSH	2 7/32	1 3/8
1 1/8	2 7/32	1 3/8
1 1/4	2 7/32	1 1/2
1 3/8	2 7/32	1 5/8
1 5/8	2 23/32	1 7/8
1 7/8	2 23/32	2 1/8

When ordering consult with Kason agent for part number, specify offset, left or right opening door. Finishes offered are Polished Aluminum, and Powder Coat Paint in a choice of colors.