



1346 ADJUSTABLE HINGE

SAG COMPENSATING


- Strap adjusts horizontally, providing door lift and rotation to compensate for sag over time.
- Built-in spring action is standard.
- Time-tested cam-rise technology assists closing and reduces gasket wear, even with uneven floors. 1346 has 40% more rise than traditional on-rise hinges to magnify the benefit.
- Flange has a removable cap, allowing lift-off of door without removing hinges.
- Left and right hand hinges use the same component parts for faster mounting and replacement.
- Covers mount securely over hinge mechanism to keep out dirt and debris.
- Performer 1346 meets NSF/ANSI Standard 2 for food equipment components.
- Spacer shims available for strap and flange to maintain alignment of pivot centerlines when kick plates are used under the lower hinges. Proper pivot alignment eliminates binding and unwanted hinge wear and tear.





U.S. Patent Nos: D719,809; 7,945,996;
8,800,109; 9,140,045; 9,146,574;
9,493,973; 7,870,642 & 7,584,523




GreenGuard.

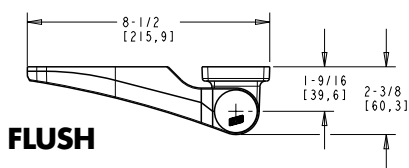

FLUSH

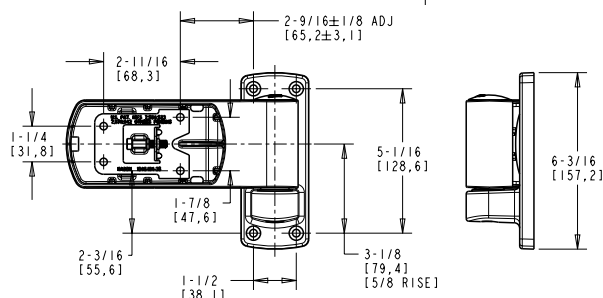

STRAP SPACER

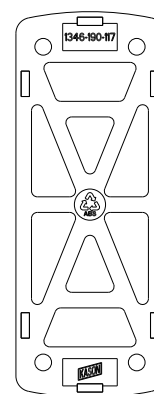

FLANGE SPACER

1346 PERFORMER HINGE

SPECIFICATIONS

MATERIAL

Precision die-cast zinc flange with nylon cam, die-cast zinc strap, and elastomer insert cover (also available in stainless steel; see page 61)

FINISH

Polished chrome or brushed chrome with black accents. Custom colors and/or patterns available, based on volume commitment.

OFFSET

Available from 0-2"

PACKAGING

4 each

ADJUSTMENT

Each strap adjusts $\pm 1/8"$ to provide $1/4"$ + height adjustment. To adjust, loosen main clamping bolts, jack door using micro adjustment screw and tighten clamping bolts.

MOUNTING

Drilled for $1/4"$ (6mm) screws

LOAD RATING

Refer to Kason's Walk-in Hardware catalog section, Hinge Selector Load Chart, page B38, Group D, , and associated footnote



*Easy adjustment by one person,
open door to make adjustments*