

1367R UNIVERSAL REPLACEMENT CAM RISE LIFT-OFF HINGE

- Fully-assembled, standard mounting hinge.
- Self-lubricating Zytel cam allows door to close automatically or to stay open at 120°
- Strap adjustment compensates for gasket compression
- Cam reverses for right or left-hand opening door
- Lift-off feature permits door removal with hinges in place for cleaning or service
- Accepts optional micro switch for automatic control of electrical device

SPECIFICATIONS

MATERIAL: High pressure, die-cast zinc flange, strap and adjustment plate; brass cover	ADJUSTMENT RANGE: 1-5/8" (41.3 mm) to 2-3/8" (60.3 mm)	LOAD RATING: See Hinge Selector Chart, Group C
FINISH: Polished chrome	MOUNTING: Flange and strap drilled and countersunk for No. 12 (5.5 mm) flat head screws	PACKAGING: 20 per carton
OFFSET: 3/16" (4.8 mm)		WEIGHT: Approx. 38.5 lb. (17.5 kg) per carton


OPTIONAL MICRO SWITCH

- Compact switch for automatic control of light, fan or other electrical device
- Fits within base of hinge
- Leads attached for easy installation
- Order hinge and switch separately
- Consult factory for UL Recognized Component certifications


SPECIFICATIONS

Single pole double throw 5 amp at 250VAC, comes with three leads (N/O and N/C) or two leads (N/C)

Model No.	Item	Qty/Carton	Wgt/Carton
11367R00016	Lift-Off Hinge	20	55 lbs. (25 kg)
11367S00010	Switch 3 Lead N/C and N/O	100	29 lbs. (13.2 kg)
11367S00011	Switch 2 Lead N/C	100	18 lbs. (8.2 kg)

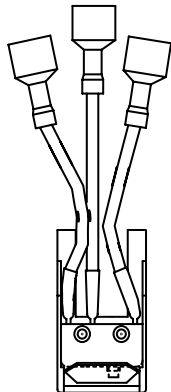

1367S MICRO SWITCH



1367R WITH 1367S MICRO SWITCH

ITEM # 1367R

NSF

COMPONENT

