

220 SPRING HINGE

- Heavy-duty, long wearing design
- Fully round pivot pin assures trouble-free operation and long life
- Spring tension adjusts quickly on site
- Adjustable to compensate for gasket compression
- Interchangeable for right or left-opening door

220S STOP HINGE

- Same as No. 220 except automatically stops door when opened 120°
- Also available with 90° stop
- Minimum order quantity may apply

SPECIFICATIONS

MATERIAL:
High pressure, die-cast zinc flange and adjustment plate, chrome-plated brass cover, zinc plated steel strap

FINISH:
Polished chrome

OFFSETS:
See ordering information

ADJUSTMENT RANGE:
3/16" (4.8 mm)

MOUNTING:
Drilled and countersunk for No. 10 (5.0 mm) screws


LOAD RATING:
See Hinge Selector Chart, Group B

PACKAGING:
24 each

WEIGHT:
Approx. 18 lb. (8.2 kg) per carton


Model No.	Item	Offset
10220000008	Hinge	1-1/8" (28.6mm)
10220000012	Hinge	1-3/8" (34.9mm)
10220S00013	90° Stop Hinge	1-3/8" (34.9mm)
10220S00012	120° Stop Hinge	1-3/8" (34.9mm)
10220000027	Spring Cartridge Kit	

ITEM # 220

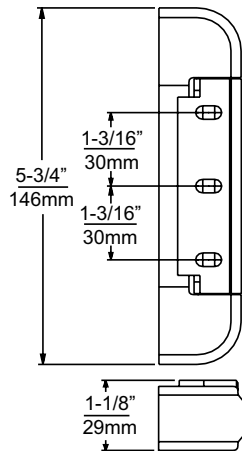

®
U.S. Trademark
2,437,925

220 SPRING CARTRIDGE KIT INSTALLATION

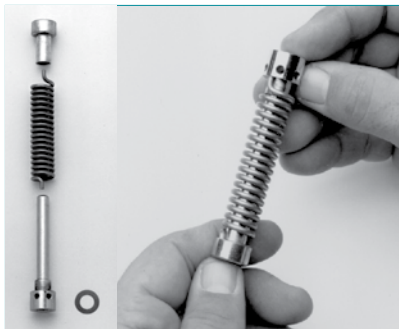

1. Assemble spring cartridge as shown.



2. Place thrust washer and bushing over hexagon pin on mounted hinge. Insert adjustment pin into adjustment bushing assembly. Grasping adjustment pin, compress spring and place adjustment bushing assembly over round pin.



3. Adjust tension; then insert stop pin in hole of adjustment bushing assembly.